




RFID Inlay Zephyr NXP Ucode 9 XE

Dimensions (WxH)
50 mm X30 mm (1.95 “ X 1.17 “)

DESCRIPTION

ARC certified against many diverse specifications for uses across apparel and general merchandise retail. With strong read rates and easily integrated design, Zephyr offers merchandise visibility across the supply chain. Compatible with various hardware setups, including handhelds and overhead readers, Zephyr delivers a versatile RFID solution for heightened efficiency and precision.

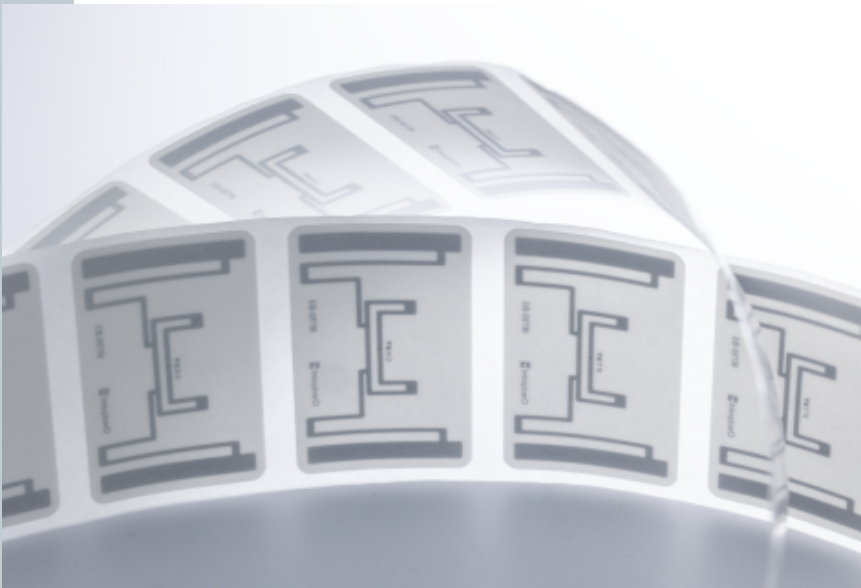

RFID SPECIFICATIONS

Protocol	ISO/IEC 18000-6C/ EPC Class 1 Gen2
Operating Frequency	860 Mhz - 960 Mhz
Chip Type	Ucode 9 XE
Unique TID / UID	96 bits
EPC Memory	128 Bits
User Memory	No data
Tag type	UHF

INDUSTRIES

Retail Apparel	Retail Cosmetics
----------------	------------------

APPLICATIONS



Omnichannel




Store processes (Cycle Count /
item locator / POS)

ARC CATEGORIES

Spec W6	Spec L	Spec R
Spec I	Spec F	SPEC Y2
Spec I and F	Spec Q	Spec W5

OTHER CERTIFICATIONS

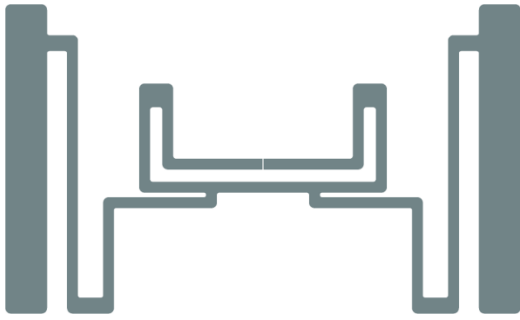


PERFORMANCE

ETSI Read Range	18.40 m
FCC Read Range	11.00 m


READ RANGE

Free Space, Light, & Heavy Loading Conditions

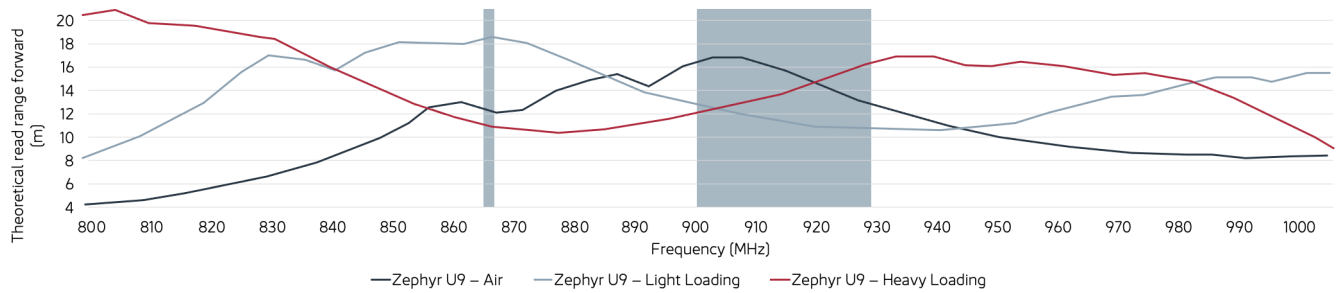

ORIENTATION SENSITIVITY

ETSI

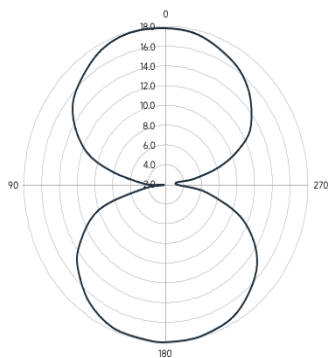

FCC

